

Uni-directional ESD Protection Diode

DESCRIPTIONS

The TESDA22VU60P2Q3 is Uni-directional ESD rated clamping cell to protect power interfaces, or control line in an electronic system. It has been specifically designed to protect sensitive electronic components which are connected to power and control lines from over-voltage damage by Electrostatic Discharging (ESD), and Lightning.

ESD protection device in a small DNF1010 Surface-Mounted Device (SMD) plastic package designed to protect two automotive In-vehicle network bus lines from the damage caused by Electrostatics discharge (ESD) and other transients.

The TESDA22VU60P2Q3 may be used to provide ESD protection up to $\pm 15\text{kV}(\text{air})$, $\pm 30\text{kV}(\text{contact})$ according to IEC 61000-4-2, and withstand peak pulse current up to $1\text{A}(10/1000\mu\text{s})$ according to IEC 61643-321.



FEATURES

- AEC-Q101 qualified
- ESD protect for 2 lines with unidirectional.
- Provide ESD protection for each channel to IEC 61000-4-2 (ESD) $\pm 15\text{kV}(\text{air})$, $\pm 30\text{kV}(\text{contact})$ IEC 61643-321 1A (10/1000 μs)
- Suitable for 22V and below, operating voltage applications
- Ultra small SMD plastic package
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS compliant
- Halogen-Free

APPLICATION

- Portable electronics
- Computers and peripherals
- Smartphones and accessories



PACKAGE: DFN1010-3LW	PIN CONFIGURATION	CIRCUIT DIAGRAM
		

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Peak pulse power ($t_p = 10/1000\mu\text{s}$)	P_{PK}	40	W
Peak pulse current ($t_p = 10/1000\mu\text{s}$)	I_{PP}	1	A
ESD according to IEC 61000-4-2 air discharge	V_{ESD}	± 15	kV
ESD according to IEC 61000-4-2 contact discharge		± 30	kV
Junction temperature range	T_J	-55 to +150	$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^\circ\text{C}$

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNIT
Reverse working voltage		V_{RWM}	-	-	22	V
Reverse breakdown voltage	$I_R = 1\text{mA}$, $T_J = 25^\circ\text{C}$	V_{BR}	25.65	27.5	28.35	V
Forward voltage	$I_F = 10\text{mA}$, $T_J = 25^\circ\text{C}$	V_F	-	0.78	0.9	V
Reverse leakage current	$V_{RWM} = 22\text{V}$	I_R	-	0.5	5	nA
Clamping voltage	$I_{PP} = 1\text{A}$, $t_p = 10/1000\mu\text{s}^{(1)}$	V_C	-	30.2	40	V
Clamping voltage ⁽²⁾	$I_{TLP} = 4\text{A}$, $t_p = 100\text{ns}$	V_{CL}	-	29.5	-	V
	$I_{TLP} = 16\text{A}$, $t_p = 100\text{ns}$		-	34.5	-	V
Junction capacitance	1MHz, $V_R = 0\text{V}$	C_J	-	51	60	pF
Dynamic resistance ⁽²⁾		R_{DYN}	-	0.42	-	Ω

Notes:

- Non-repetitive current pulse, according to IEC 61643-321
- TLP parameter: $Z_0 = 50\ \Omega$, $t_p = 100\text{ns}$, $t_r = 2\text{ns}$, averaging window from 60ns to 80ns. R_{DYN} is calculated from 4A to 16A.

ORDERING INFORMATION

ORDERING CODE	PACKAGE	PACKING
TESDA22VU60P2Q3 RNG	DFN1010-3LW	10,000 / 7" Tape & Reel

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Peak Pulse Power vs. Junction Temperature

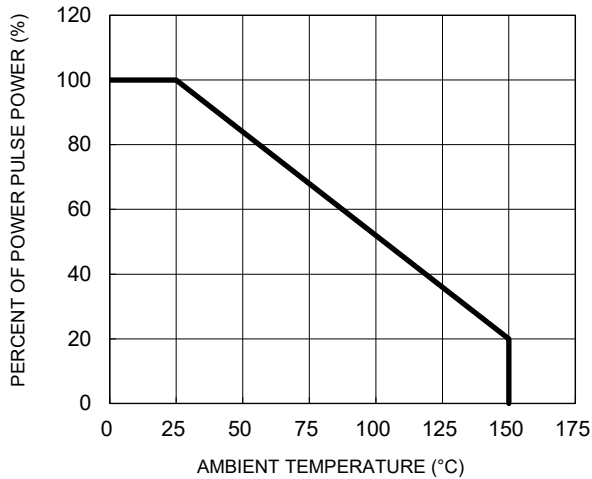


Fig.2 Non-Repetitive Peak Pulse Power vs. Pulse Time

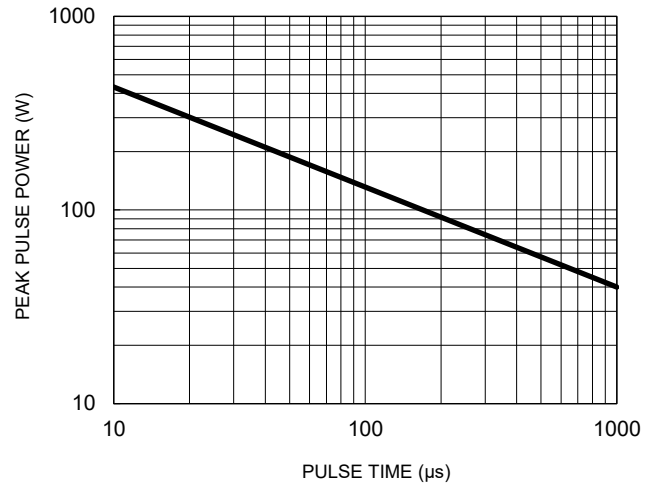


Fig.3 Clamping Voltage vs. Peak Pulse Current

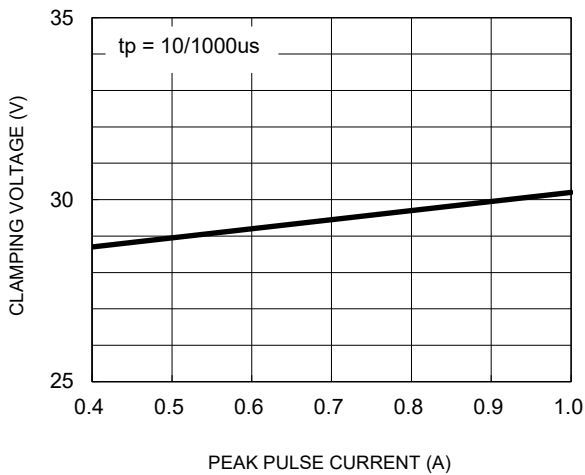


Fig.4 Capacitance vs. Reverse Voltage


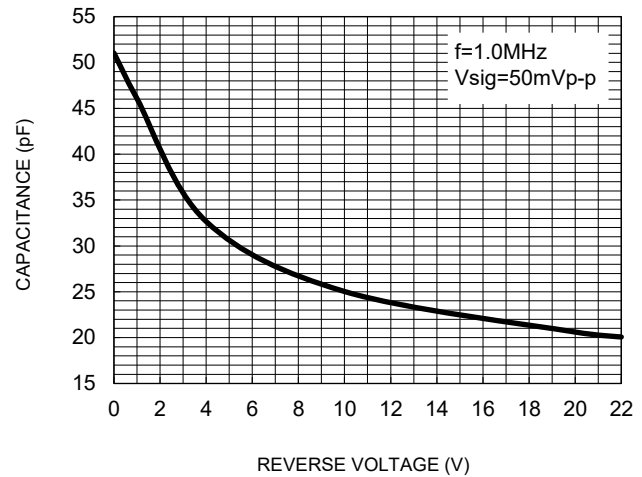


Fig.5 TLP Curve

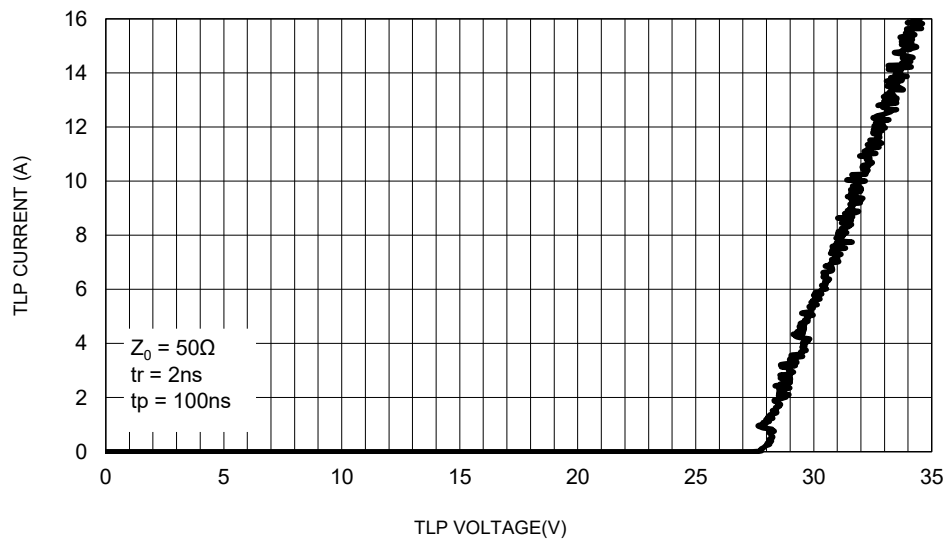

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.6 10/1000 μs pulse waveform


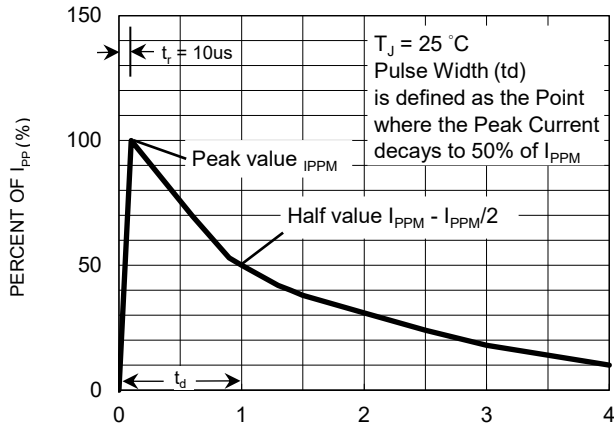


Fig.7 ESD pulse waveform per IEC61000-4-2

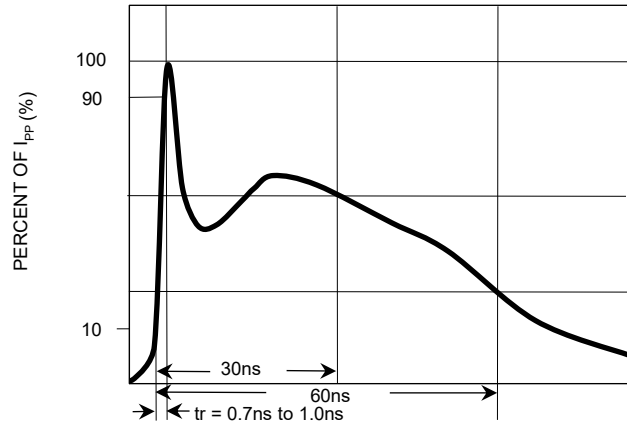

APPLICATION INFORMATION

Device Connection

The TESDA22VU60P2Q3 is designed for protection from the damage caused by ESD and surge pulses.


The usage of the TESDA22VU60P2Q3 is shown in Fig1. Protected line.

To minimize parasitic inductance in the board traces, all path lengths connected to the pins of TESDA22VU60P2Q3 should be kept as short as possible.

To obtain enough suppression of ESD transient, a good circuit board is critical. Thus, the following guidelines are recommended:


- Let the path length between the protected lines and the TESDA22VU60P2Q3 minimize.
- Place the TESDA22VU60P2Q3 near the input terminals or connectors to restrict transient coupling.
- The ESD current return path to ground should be kept as short as possible.
- Use ground plane whenever possible.

Fig.1 ESD protection by TESDA22VU60P2Q3

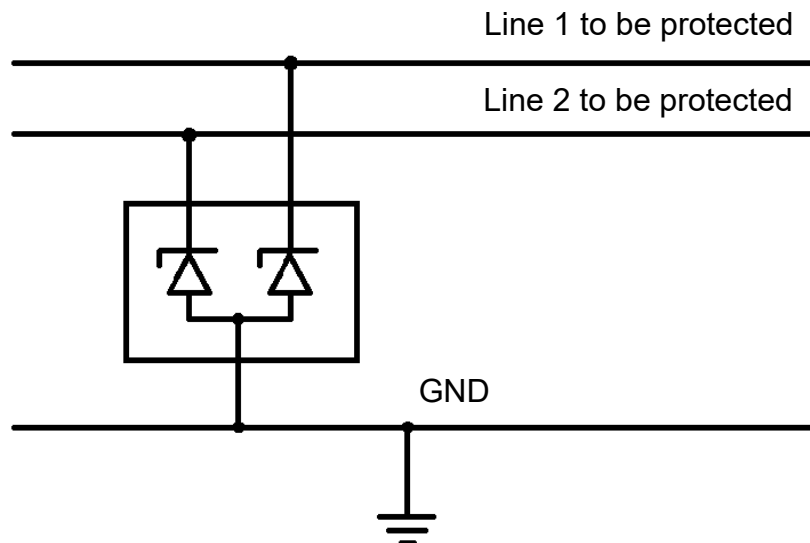

PACKAGE OUTLINE DIMENSIONS

DFN1010-3LW

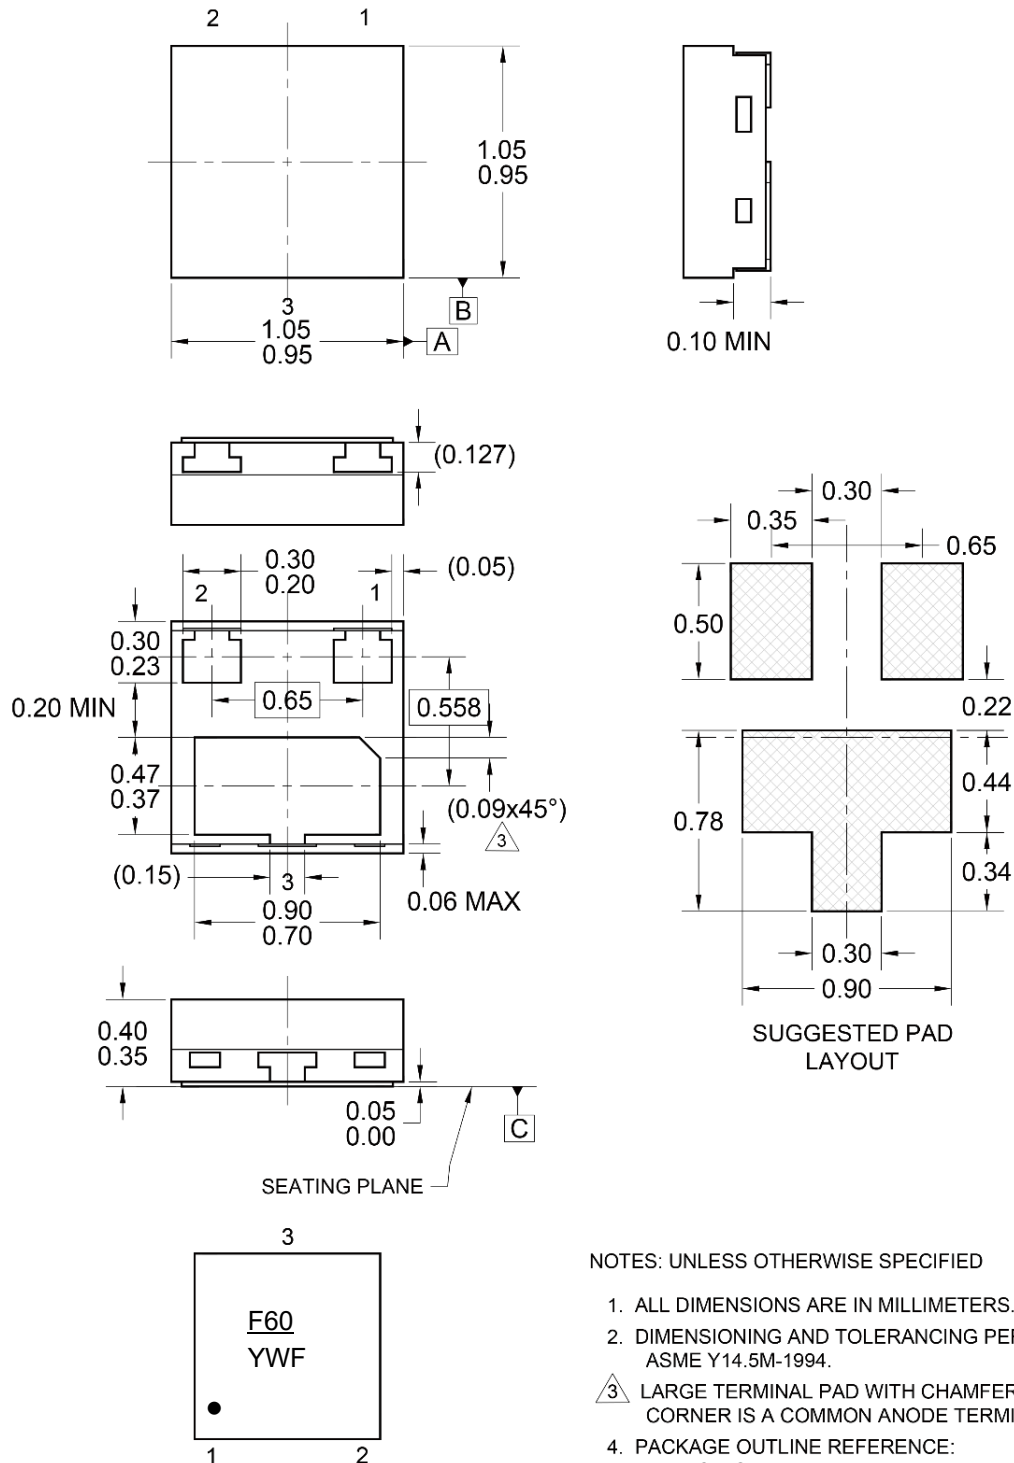

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. LARGE TERMINAL PAD WITH CHAMFER CORNER IS A COMMON ANODE TERMINAL.
4. PACKAGE OUTLINE REFERENCE: JEDEC MO-340BA.
5. DWG NO. REF: HQ2SD07-DFN1010_3LW-124 REV B.

MARKING DIAGRAM

F60 = Device code
Y = Year code
W = Bi-week code (A~Z)
F = Factory code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.