

## 6A, 400V - 600V Super Fast Surface Mount Rectifier

### FEATURES

- Very low profile, typical height of 1.1mm
- 175°C operating junction temperature
- Glass passivated chip junction
- Low conduction loss
- Low leakage current
- High forward surge capability
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free

### APPLICATIONS

- DC to DC converter
- Switching mode converters and inverters
- Freewheeling application


### MECHANICAL DATA

- Case: TO-277A (SMPC4.6U)
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: Indicated by cathode band
- Weight: 0.095g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_F$	6	A
$V_{RRM}$	400 - 600	V
$I_{FSM}$	100	A
$T_{JMAX}$	175	°C
Package	TO-277A (SMPC4.6U)	
Configuration	Single die	



TO-277A (SMPC4.6U)



ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)				
PARAMETER	SYMBOL	TPMR6G	TPMR6J	UNIT
Marking code on the device		MR6G	MR6J	
Repetitive peak reverse voltage	$V_{RRM}$	400	600	V
Reverse voltage, total rms value	$V_{R(RMS)}$	280	420	V
Forward current	$I_F$	6		A
Surge peak forward current, 8.3ms single half sine wave superimposed on rated load	$I_{FSM}$	100		A
Junction temperature	$T_J$	-55 to +175		°C
Storage temperature	$T_{STG}$	-55 to +175		°C

<b>THERMAL PERFORMANCE</b>			
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>UNIT</b>
Junction-to-lead thermal resistance <sup>(1)</sup>	$R_{\theta JL}$	9.5	°C/W
Junction-to-ambient thermal resistance <sup>(2)</sup>	$R_{\theta JA}$	86	°C/W

**Notes:**

1. Mounted on FR4 PCB with 16mm x 16mm Cu pad area
2. Free air, mounted on recommended pad

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)						
<b>PARAMETER</b>		<b>CONDITIONS</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>MAX</b>	<b>UNIT</b>
Forward voltage <sup>(1)</sup>	TPMR6G	$I_F = 6\text{A}, T_J = 25^\circ\text{C}$	$V_F$	-	1.20	V
	TPMR6J			-	1.80	V
	TPMR6G	$I_F = 6\text{A}, T_J = 125^\circ\text{C}$		-	1.00	V
	TPMR6J			-	-	V
Reverse current @ rated $V_R$ <sup>(2)</sup>		$T_J = 25^\circ\text{C}$	$I_R$	-	10	$\mu\text{A}$
		$T_J = 125^\circ\text{C}$		-	500	$\mu\text{A}$
Junction capacitance		1MHz, $V_R = 4.0\text{V}$	$C_J$	60	-	pF
Reverse recovery time	TPMR6G	$I_F = 0.5\text{A}, I_R = 1.0\text{A}$ $I_{rr} = 0.25\text{A}$	$t_{rr}$	-	35	ns
	TPMR6J			-	40	ns
Reverse recovery time	TPMR6G	$I_F = 1\text{A}, di/dt = -50\text{A}/\mu\text{s}$ $V_R = 30\text{V}$	$t_{rr}$	-	60	ns
	TPMR6J			-	-	ns

**Notes:**

1. Pulse test with  $PW = 0.3\text{ms}$
2. Pulse test with  $PW = 30\text{ms}$

<b>ORDERING INFORMATION</b>		
<b>ORDERING CODE</b> <sup>(1)</sup>	<b>PACKAGE</b>	<b>PACKING</b>
TPMR6x	TO-277A (SMPC4.6U)	6,000 / Tape & Reel


**Notes:**

1. "x" defines voltage from 400V(TPMR6G) to 600V(TPMR6J)


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

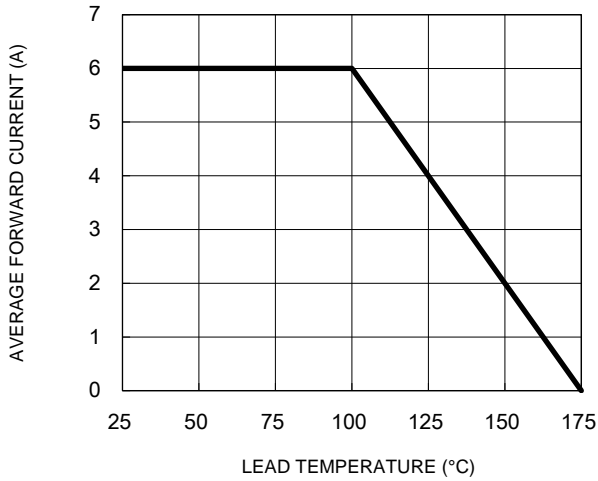


**Fig.2 Typical Junction Capacitance**

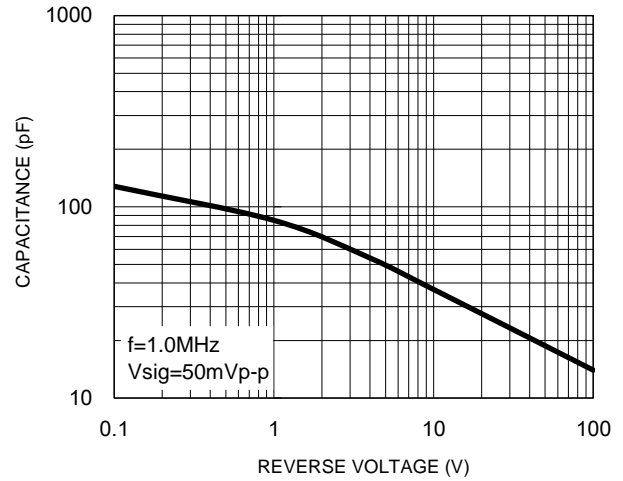


**Fig.3 Typical Reverse Characteristics**

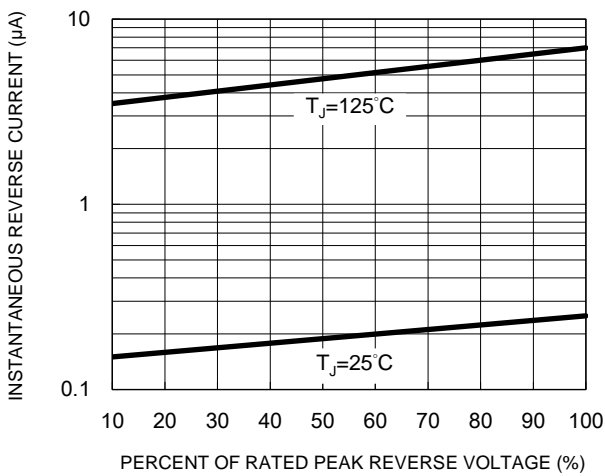

**Fig.4 Typical Forward Characteristics**




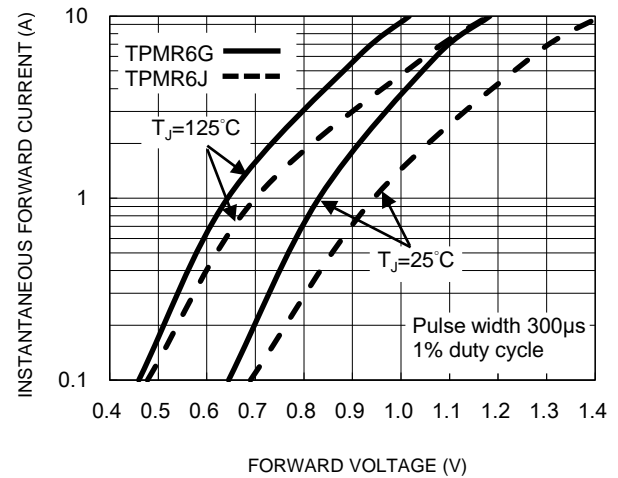


**Fig.5 Maximum Non-Repetitive Forward Surge Current**

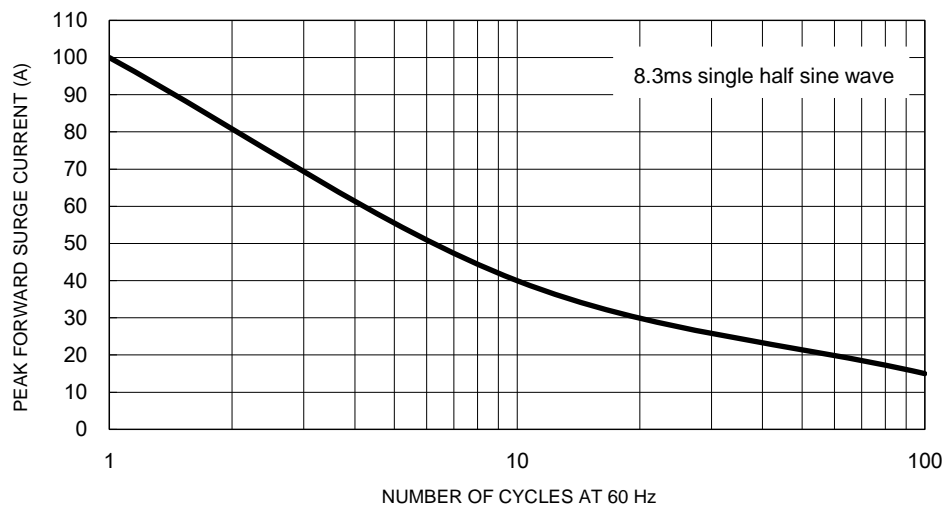


**PACKAGE OUTLINE DIMENSIONS**

**TO-277A (SMPC4.6U)**

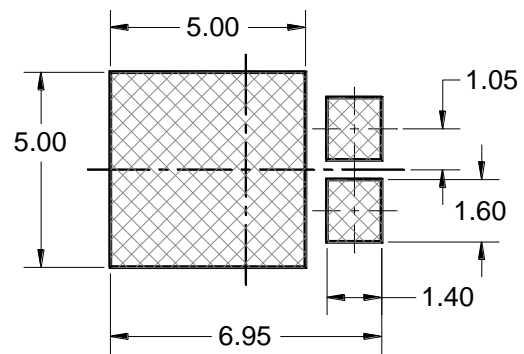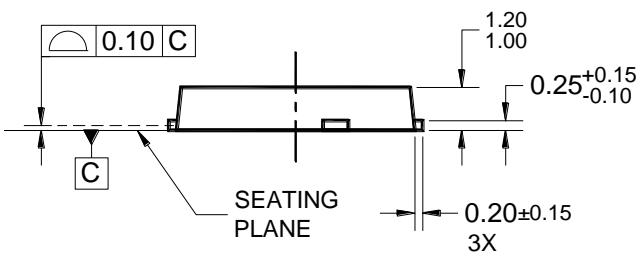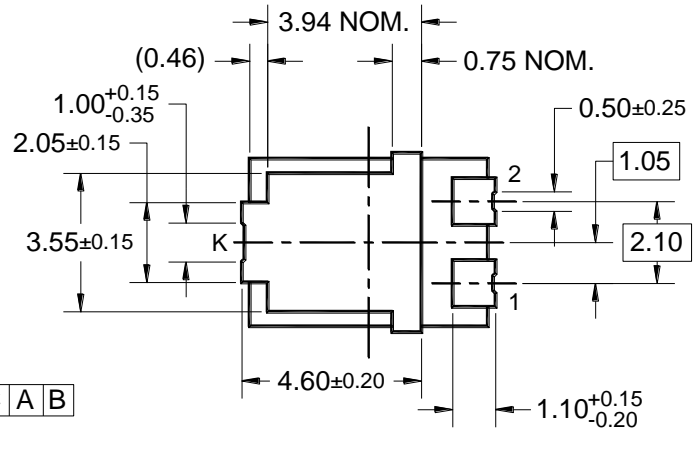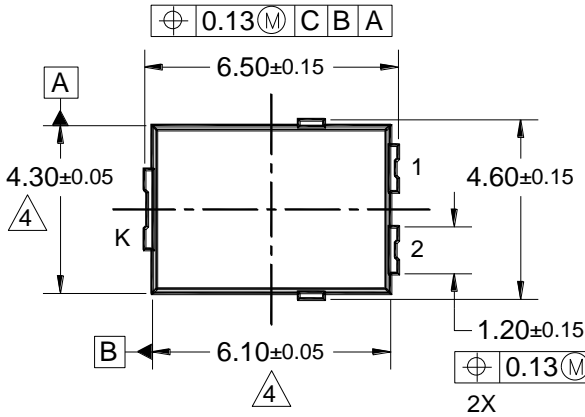

**SUGGESTED PAD LAYOUT**



**MARKING DIAGRAM**

P/N = MARKING CODE  
YWF = DATE CODE  
F = FACTORY CODE

**NOTES: UNLESS OTHERWISE SPECIFIED**

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. PACKAGE OUTLINE REFERENCE: JEDEC TO-277 ISSUE A.
4. MOLDED PLASTIC BODY DIMENSIONS DO NOT INCLUDE MOLD LASH, PROTRUSIONS OR GATE BURRS.
5. DWG NO. REF: HQ2SD07-SMPC4.6U-031 REV A.

## **Notice**

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.