

250mA Low Quiescent Current CMOS LDO

DESCRIPTION


TS9011 is a positive voltage regulator developed utilizing CMOS technology featured very low power consumption, low dropout voltage and high output voltage accuracy. Built in low on-resistor provides low dropout voltage and large output current. A 1 μ F or greater can be used as an output capacitor. TS9011 are prevented device failure under the worst operation condition with both thermal shutdown and current fold-back. These series are recommended for configuring portable devices and large current application, respectively.

FEATURES

- Dropout voltage 0.4V (typ.) @ $I_o=250\text{mA}$
- Output current up to 250mA
- Low power consumption, 2 μ A (typ.)
- Output voltage $\pm 2\%$
- Internal current limit
- Thermal shutdown protection
- RoHS Compliant
- Halogen-Free according to IEC 61249-2-21

APPLICATION

- Battery-operated systems
- Microprocessor reset circuitry
- Memory battery back-up circuits
- Power-on reset circuits
- Power failure detection
- System battery life and charge voltage monitors



SOT-23

Pin Definition:

1. Ground
2. Output
3. Input




SOT-89

Pin Definition:

1. Ground
2. Input
3. Output

Notes: Moisture sensitivity level: level 3. Per J-STD-020

TYPICAL APPLICATION CIRCUIT

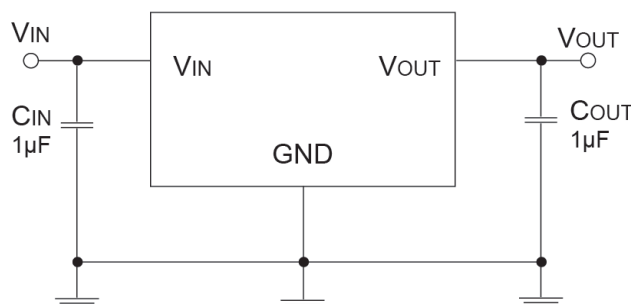

*Tantalum capacitor for Input & Output capacitor are recommended.

| ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise specified) (Note 1) | | | |
|---|-----------|------------|------------------|
| PARAMETER | SYMBOL | LIMIT | UNIT |
| Input Supply Voltage | V_{IN} | 12 | V |
| Output Current | I_{OUT} | 250 | mA |
| Power Dissipation | SOT-23 | 0.30 | W |
| | SOT-89 | 0.50 | |
| Operating Ambient Temperature | T_{OPR} | -40 ~ +85 | $^\circ\text{C}$ |
| Junction Temperature Range | T_J | -40 ~ +150 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | -65 ~ +150 | $^\circ\text{C}$ |

| THERMAL PERFORMANCE | | | |
|--|--------|-------|--------------------|
| PARAMETER | SYMBOL | LIMIT | UNIT |
| Thermal Resistance - Junction to Ambient | SOT-23 | 333 | $^\circ\text{C/W}$ |
| | SOT-89 | 200 | |

Note: Measured with FR4 4-layer board having thermal via holes

| ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise specified) | | | | | | |
|---|---|---------|------|-----|------|-----------------------|
| PARAMETER | CONDITION | | MIN | TYP | MAX | UNIT |
| Output Voltage | $V_{IN}=V_O + 1V,$ $I_O=40mA,$ | TS90115 | 4.90 | 5.0 | 5.10 | V |
| | | TS9011S | 3.23 | 3.3 | 3.36 | |
| | | TS9011K | 2.45 | 2.5 | 2.55 | |
| | | TS9011D | 1.76 | 1.8 | 1.83 | |
| Maximum Output Current | $V_{IN}=V_O+1V,$ | | 250 | -- | -- | mA |
| Input Stability | $V_O+1V \leq V_{IN} \leq V_O+2V, I_O=1mA$ | | -- | 0.2 | 0.3 | % |
| Load Regulation (Note1) | $V_{IN}=V_O+1V,$ $1mA \leq I_L \leq 100mA$ | TS90115 | -- | 40 | 80 | mV |
| | | TS9011S | | | | |
| | $V_{IN}=V_O+1V,$ $1mA \leq I_L \leq 80mA$ | TS9011K | -- | 40 | 90 | |
| | | TS9011D | | | | |
| Dropout Voltage (Note 2) | $I_O=250mA$ | TS90115 | -- | 400 | 600 | mV |
| | $I_O=200mA$ | TS9011S | -- | 400 | 650 | |
| | $I_O=160mA$ | TS9011K | -- | 400 | 700 | |
| | $I_O=120mA$ | TS9011D | -- | 400 | 750 | |
| Quiescent Current | $V_{IN}=V_O+1V, I_O=0A$ | | -- | 2 | 5 | μA |
| Output Current Limit | $V_{OUT} < 0.4V$ | | -- | 400 | -- | mA |
| Power Supply Rejection Ratio | At $f=100kHz, I_O=10mA,$ | | -- | 30 | -- | dB |
| Output Voltage Temperature Coefficient (Note 3) | | | -- | 100 | -- | ppm/ $^\circ\text{C}$ |


Note:

1. Regulation is measured at constant junction temperature, using pulsed ON time.
2. Dropout is measured at constant junction temperature, using pulsed ON time, and the criterion is V_{OUT} inside target value +/-2%.
3. Guaranteed by design.

ORDERING INFORMATION

| OUTPUT VOLTAGE | PART NO. | PACKAGE | PACKING |
|----------------|---------------|---------|--------------------|
| 1.8V | TS9011DCX RFG | SOT-23 | 3,000pcs / 7" Reel |
| | TS9011DCY RMG | SOT-89 | 1,000pcs / 7" Reel |
| 2.5V | TS9011KCX RFG | SOT-23 | 3,000pcs / 7" Reel |
| | TS9011KCY RMG | SOT-89 | 1,000pcs / 7" Reel |
| 3.3V | TS9011SCX RFG | SOT-23 | 3,000pcs / 7" Reel |
| | TS9011SCY RMG | SOT-89 | 1,000pcs / 7" Reel |
| 5V | TS90115CX RFG | SOT-23 | 3,000pcs / 7" Reel |
| | TS90115CY RMG | SOT-89 | 1,000pcs / 7" Reel |

FUNCTION BLOCK DIAGRAM

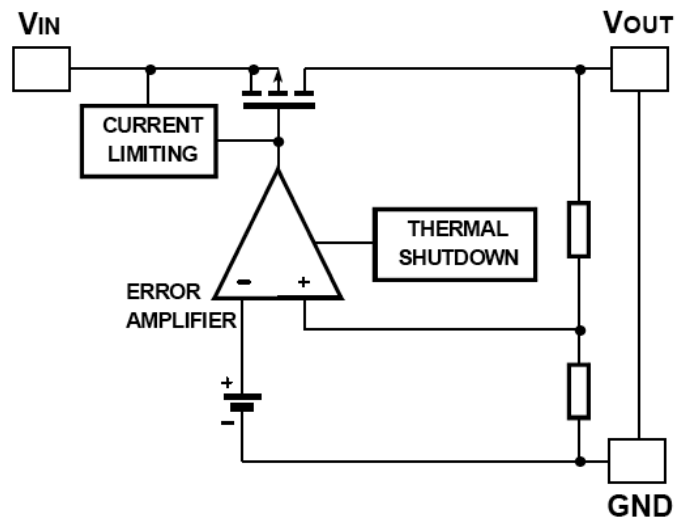

ELECTRICAL CHARACTERISTICS CURVES ($T_A=25^\circ\text{C}$, unless otherwise noted)

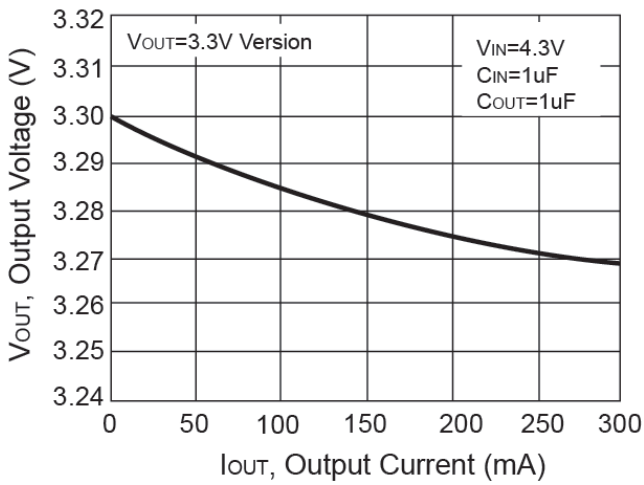


Figure 1. Output Voltage vs. Output Current

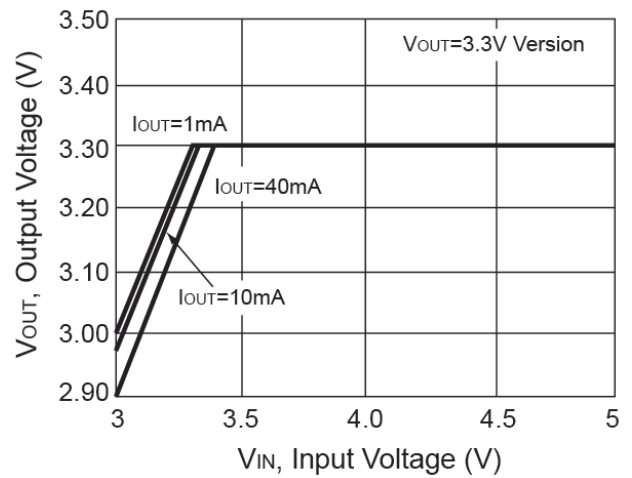


Figure 2. Output Voltage vs. Input Voltage

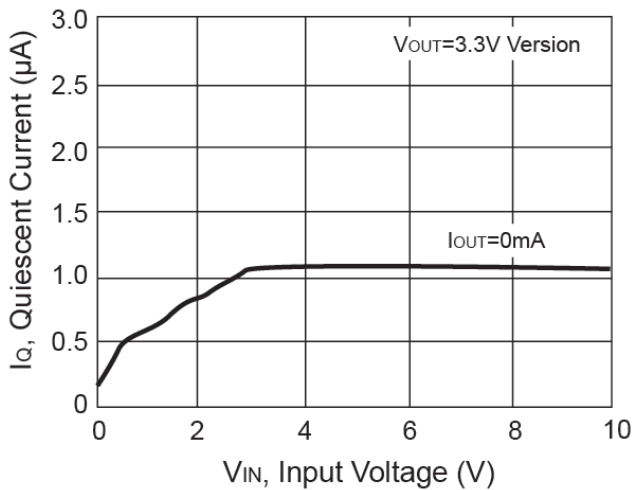


Figure 3. Quiescent Current vs. Input Voltage






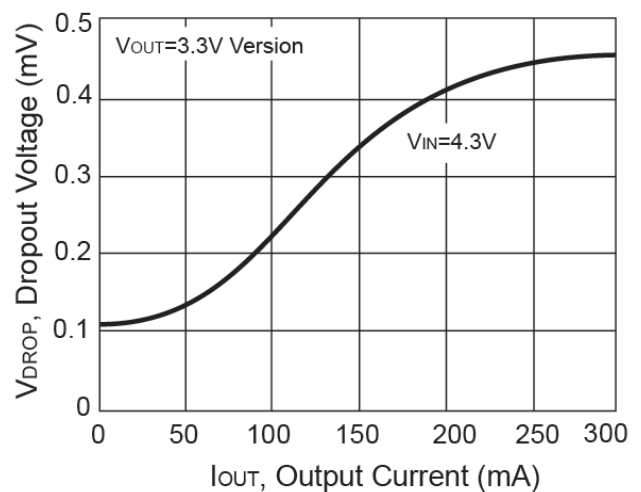



Figure 4. Short Circuit Current vs. Input Voltage

PACKAGE OUTLINE DIMENSIONS

SOT-23

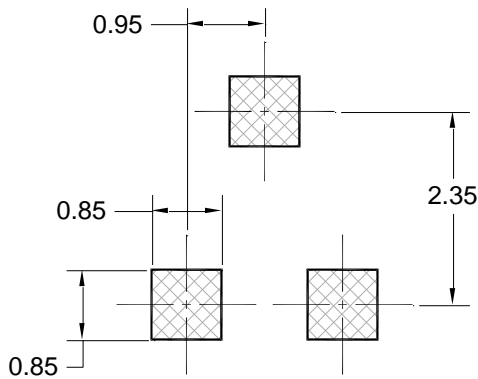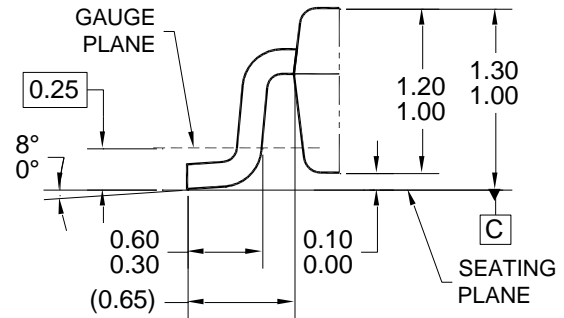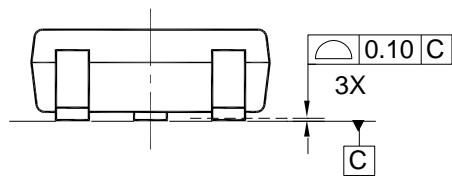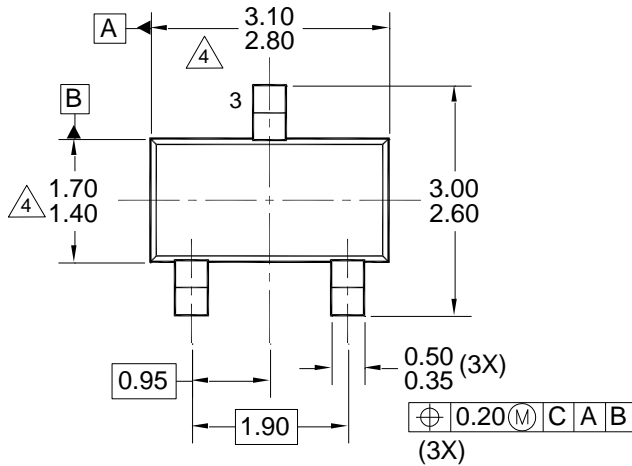

SUGGESTED PAD LAYOUT



MARKING DIAGRAM

NOTES: UNLESS OTHERWISE SPECIFIED






1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. PACKAGE OUTLINE REFERENCE: EIAJ ED-7500A, SC-59.
4. MOLDED PLASTIC BODY DIMENSIONS DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
5. DWG NO. REF: HQ2SD07-SOT23IC-104 REV A.

- P/N = PRODUCT DEVICE CODE
 Y = YEAR CODE
 M = MONTH CODE FOR HALOGEN FREE PRODUCT
 O = JAN P = FEB Q = MAR R = APR
 S = MAY T = JUN U = JUL V = AUG
 W = SEP X = OCT Y = NOV Z = DEC
 L = LOT CODE

Device code: E
 Voltage code: D (1.8V), K (2.5V), S (3.3V), 5 (5V)

PACKAGE OUTLINE DIMENSIONS

SOT-89

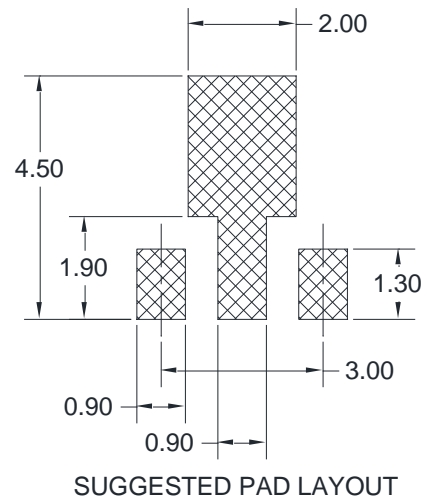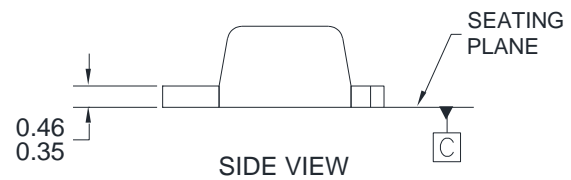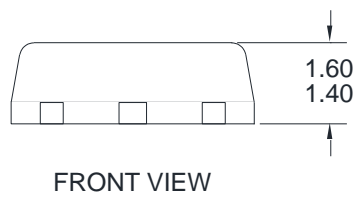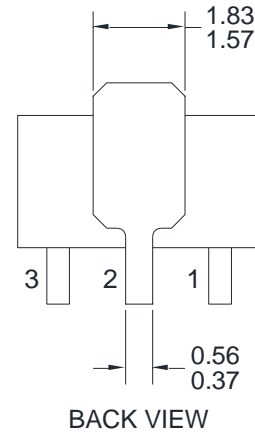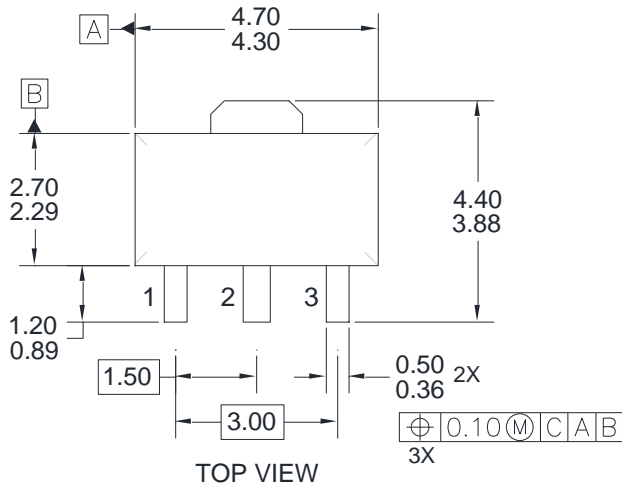

P/N = Product device code
 Device code = 9011
 Y = YEAR CODE
 M = MONTH CODE FOR HALOGEN FREE PRODUCT
 O = JAN P = FEB Q = MAR R = APR
 S = MAY T = JUN U = JUL V = AUG
 W = SEP X = OCT Y = NOV Z = DEC
 L = LOT CODE
 X = VOLTAGE CODE
 Voltage Code = D (1.8V), K (2.5V), S (3.3V), 5 (5V)

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. PACKAGE OUTLINE REFERENCE: JEDEC TO-243, ISSUE C, VARIATION AA.
4. MOLDED PLASTIC BODY DIMENSIONS DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
5. DWG NO REF: HQ2SD07-SOT89-024 REV A.

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.