

Package View

Surface Mount package packed per EIA/JEDEC Standard RS-481, IEC60286-3



SOD-123HE


Packing Quantity

Packing Type	Packing Code	Packaging Description	Reel (pc)	Inner Box (pc)	Carton (pc)	Carton Size (mm)
Reel	-	8 mm Tape, 13" Diameter Plastic Reel	10,000	20,000	100,000	360x355x200

Component Orientation

Device Orientation and Direction of Feed


Unidirectional: Cathode Toward Sprocket Hole.

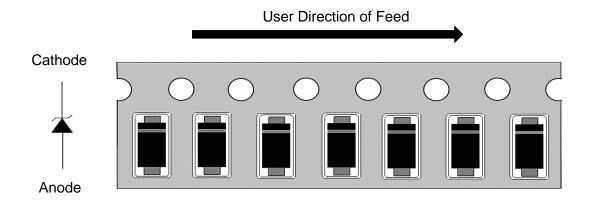




Component Lateral Movement

Maximum lateral movement for punched and embossed carrier 8 mm Tape

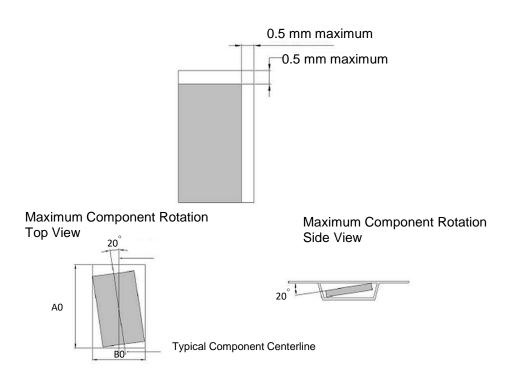


Tape leader & trailer

- Unfilled leader and trailer pockets are sealed
- Leaders and trailers are taped to tape and hub, respectively, with masking tape
- All materials are static-dissipative

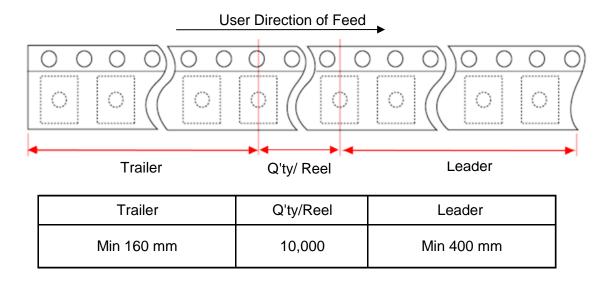



Embossed Carrier Tape Specification

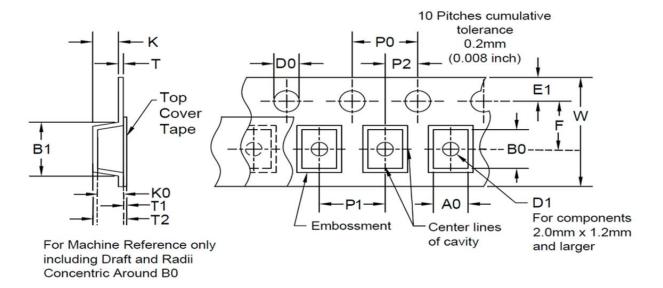

Note 1: B1 is for tape feeder reference only, including draft concentric about Bo.

Note 2: A0,B0,K0 are determined by component size. The clearance between the component and the cavity must be within 0.05mm(.002")min. to 0.65mm(.025")max. for 12mm tape, 0.05mm(.002")min to 0.90mm(.035")max. for 16mm tape. In addition, the components cannot rotate more than 20° within the determined cavity.


Note3: Surface Resistance $10^6 \sim 10^{11} \Omega$.


ALL DIMENSION IN MILLIMETERS(Unit: mm)

Dim	size	D0	E1	P0	P2	Т	Ao	Во	Ko
Spec	8mm	1.5 +0.1,-0	1.75 ±0.1	4 ±0.1	2 ±0.05	0.22 ±0.02	1.95 ±0.1	3.95 ±0.1	1.35 ±0.1
Dim	Tape size	B1	D1	F	W	P1	К	T1	T2
Spec	8mm	-	1 +0.25,-0	3.5 ±0.05	8 ±0.2	4 ±0.1	ı	ı	-




Reel Specification

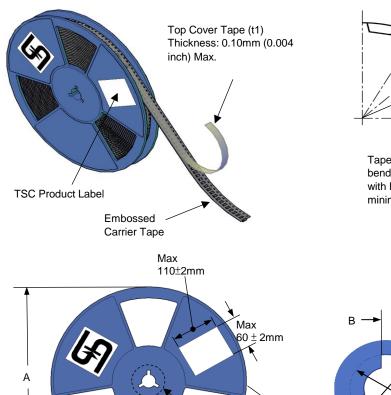



Tape with components shall pass around bending radius without damage, for reels with hub diameters. approaching minimum dimension.



ALL DIMENSION IN MILLIMETERS (Unit: mm)

Reel Size	Tape size	А	В	С	D	N	G	Т
13"	8mm	330 ±0.5	2.3 ±0.2	13.3 ±0.1	-	100 ±0.5	8.4 +2.0/-0	9.4 +0.3/-0

Label

SEE DETAIL

AA

Note1: Surface Resistance $10^6 \sim 10^{11} \Omega$.