

Package View

Surface Mount package packed per EIA/JEDEC Standard RS-481, IEC60286-3




SOP-8EP

Packing Quantity

Packing	Packing	Packaging Description	Reel	Inner Box	Carton	Carton Size
Type	Code		(pc)	(pc)	(pc)	(mm)
Reel	ı Rı	12 mm Tape, 13" Diameter Plastic Reel	2,500	5,000	25,000	383x285x390

Component Orientation

Device Orientation and Direction of Feed

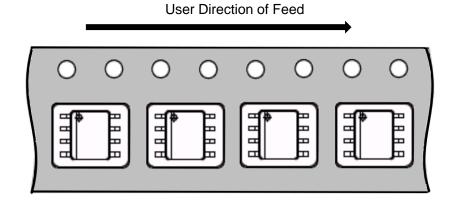




Component Lateral Movement


Maximum lateral movement for punched and embossed carrier

12 mm Tape




Maximum Component Rotation

Maximum Component Rotation

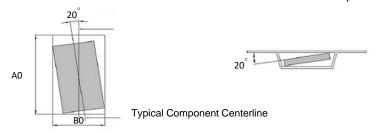


Tape leader & trailer

- Unfilled leader and trailer pockets are sealed
- · Leaders and trailers are taped to tape and hub,respectively, with masking tape
- All materials are static-dissipative

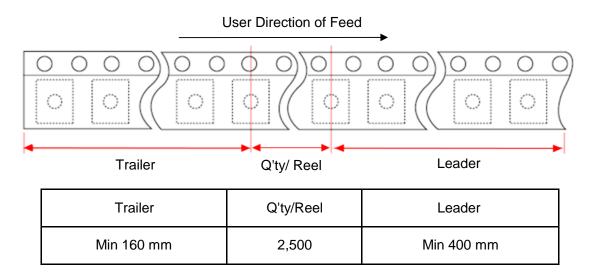



Embossed Carrier Tape Specification

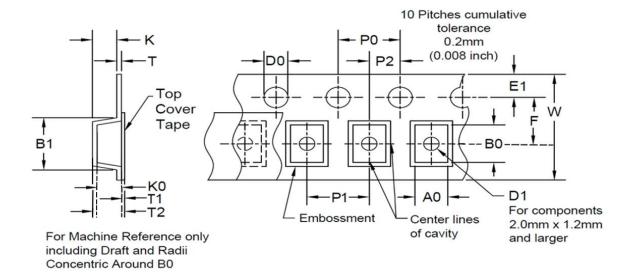

Note 1: B1 is for tape feeder reference only, including draft concentric about Bo.

Note 2 : A0,B0,K0 are determined by component size. The clearance between the component and the cavity must be within 0.05mm(.002")min. to 0.65mm(.025")max. for 12mm tape, 0.05mm(.002")min to 0.90mm(.035")max. for 16mm tape. In addition, the components cannot rotate more than 20° within the determined cavity.

Note3: Surface Resistance $10^5 \sim 10^{10} \Omega$.

ALL DIMENSION IN MILLIMETERS(Unit: mm)

Dim	Tape size	D0	E1	P0	P2	Т	Ao	Во	Ko
Spec	12mm	1.5 +0.1/-0	1.75 ±0.10	4.00 ±0.2	2.00 ±0.05	0.30 ±0.05	6.50 ±0.10	5.20 ±0.10	2.10 ±0.10
Dim	Tape	R 1	D1	E	۱۸/	D1	K	T1	T2


Dim	Tape size	B1	D1	F	W	P1	K	T1	T2
Spec	12mm	-	1.50 Min	5.50 ±0.05	12.0 ±0.3	8.00 ±0.10	-	-	-

R Min. Bending

Radius



Reel Specification

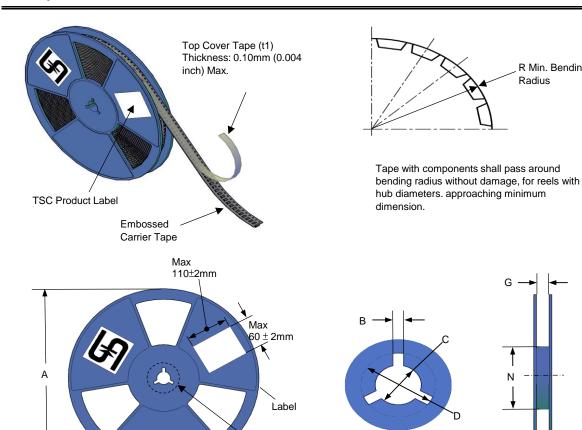

ALL DIMENSION IN MILLIMETERS (Unit: mm)

Reel Size	Tape size	А	В	С	D	N	G	Т
13"	12mm	330.0 ±2.0	2.0 ±0.5	13.0 +0.5/-0.02	20.2 Min	102.0 ±2.0	12.8 +1.6/-0.4	18.4 Max

SEE DETAIL

AΑ

DETAIL AA

Note1 : Surface Resistance $10^5 \sim 10^{10} \Omega$.