

Package View

Surface Mount package packed per EIA/JEDEC Standard RS-481, IEC60286-3




SOT-23

Packing Quantity

Packing Type	Packing Code	Packaging Description	Reel (pc)	Inner Box (pc)	Carton (pc)	Carton Size (mm) (Max)
Reel	R5	8 mm Tape, 13" Diameter Plastic Reel	10,000	30,000	150,000	360x355x233
Reel	RU	8 mm Tape, 7" Diameter Plastic Reel	3,000	45,000	180,000	438x438x220
Reel	RF	8 mm Tape, 7" Diameter Plastic Reel	3,000	18,000	108,000	385x270x217
Reel	RF	8 mm Tape, 7" Diameter Plastic Reel	3,000	12,000	144,000	600x350x240
Reel	RF	8 mm Tape, 7" Diameter Plastic Reel	3,000	30,000	120,000	445x445x230
Reel	RK	8 mm Tape, 13" Diameter Plastic Reel	10,000	20,000	100,000	360x360x290


Component Orientation

Device Orientation and Direction of Feed

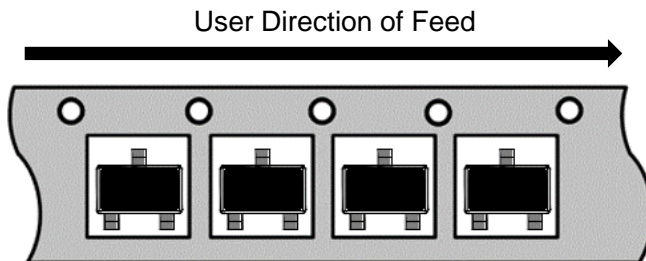


Component Lateral Movement

Maximum lateral movement for punched and embossed carrier
8 mm Tape

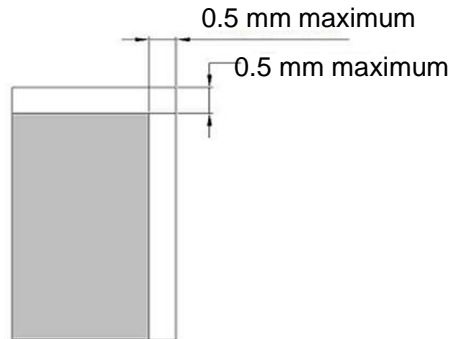

Maximum Component Rotation




Maximum Component Rotation




Tape leader & trailer

- Unfilled leader and trailer pockets are sealed
- Leaders and trailers are taped to tape and hub, respectively, with masking tape
- All materials are static-dissipative

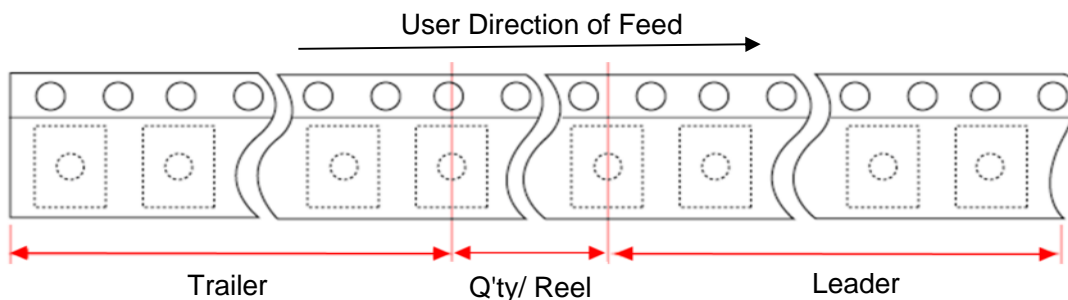

Trailer	Q'ty/Reel	Leader
Min 160 mm	3,000	Min 400 mm
Min 160 mm	10,000	Min 400 mm

Embossed Carrier Tape Specification

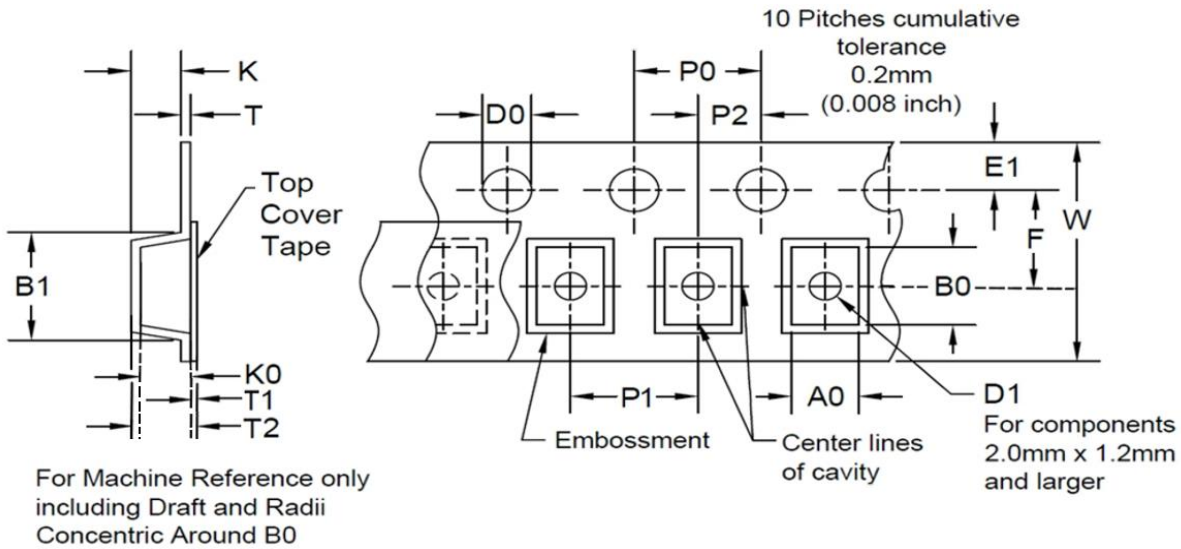

Note 1: B1 is for tape feeder reference only, including draft concentric about Bo.

Note 2 : A0,B0,K0 are determined by component size. The clearance between the component and the cavity must be within 0.05mm(.002")min. to 0.65mm(.025")max. for 12mm tape, 0.05mm(.002")min to 0.90mm(.035")max. for 16mm tape. In addition, the components cannot rotate more than 20° within the determined cavity.


Note3: Surface Resistance $10^4 \sim 10^{11} \Omega$.

ALL DIMENSION IN MILLIMETERS(Unit : mm)

Dim	Tape size	D0	E1	P0	P2	T	Ao	Bo	Ko
Spec	8mm	1.5 ±0.1	1.75 ±0.1	4 ±0.2	2 ±0.1	0.369 Max	0.05~5.5	0.05~5.5	0.05~5.5

Dim	Tape size	B1	D1	F	W	P1	K	T1	T2
Spec	8mm	--	1 +0.25,-0.1	3.5 ±0.1	8 +0.3,-0.2	4 ±0.2	--	--	--

Reel Specification

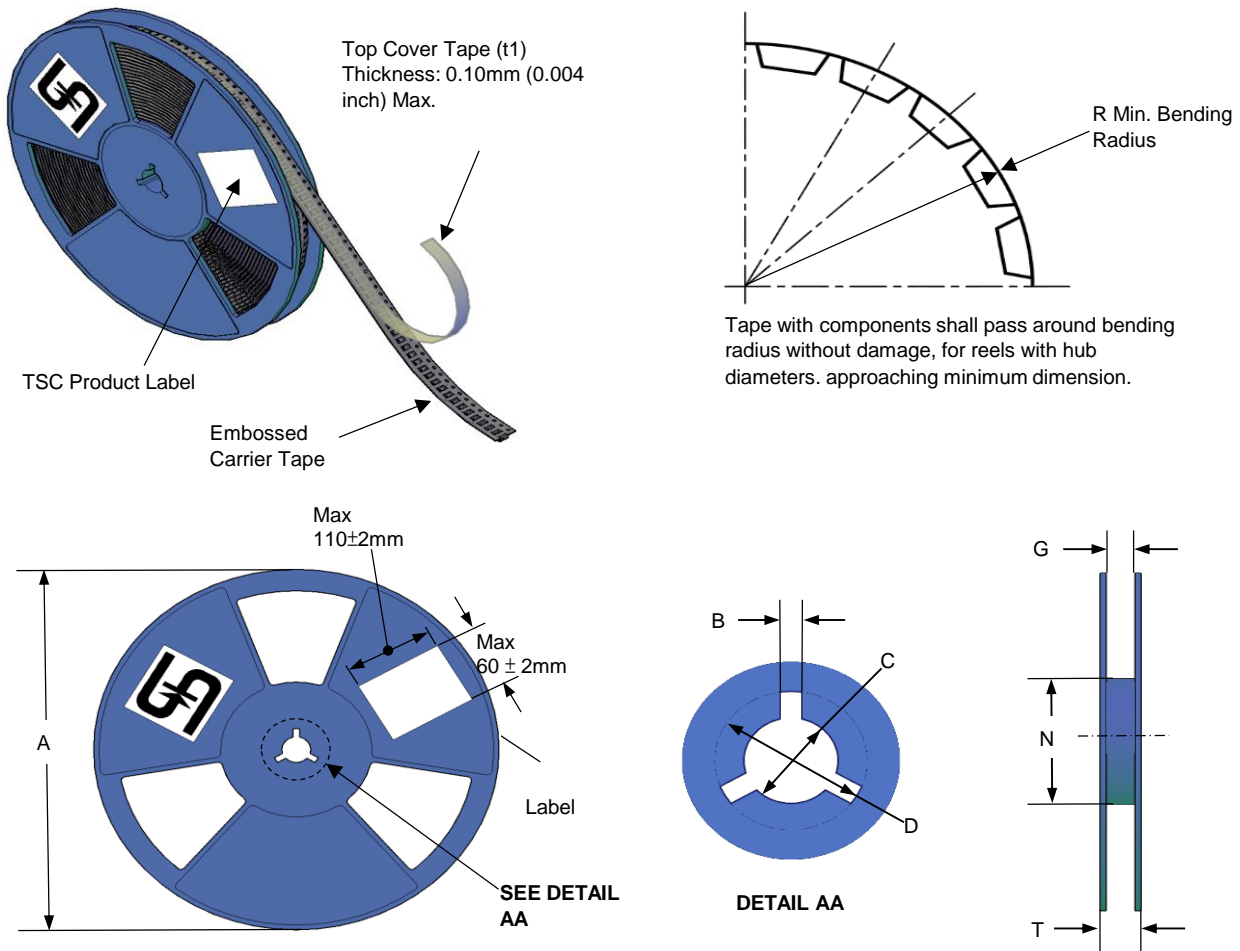

ALL DIMENSION IN MILLIMETERS (Unit : mm)

Reel Size	Tape size	A	B	C	D	N	G	T
7"	8mm	181 max	1.7~2.8	12~14	--	50 min	8 min	--
13"	8mm	330 +2/-3	2 ±0.5	13 ±0.5	--	59.5 Min	8.1~12	--

Note1 : Surface Resistance $10^4 \sim 10^{11} \Omega$.