

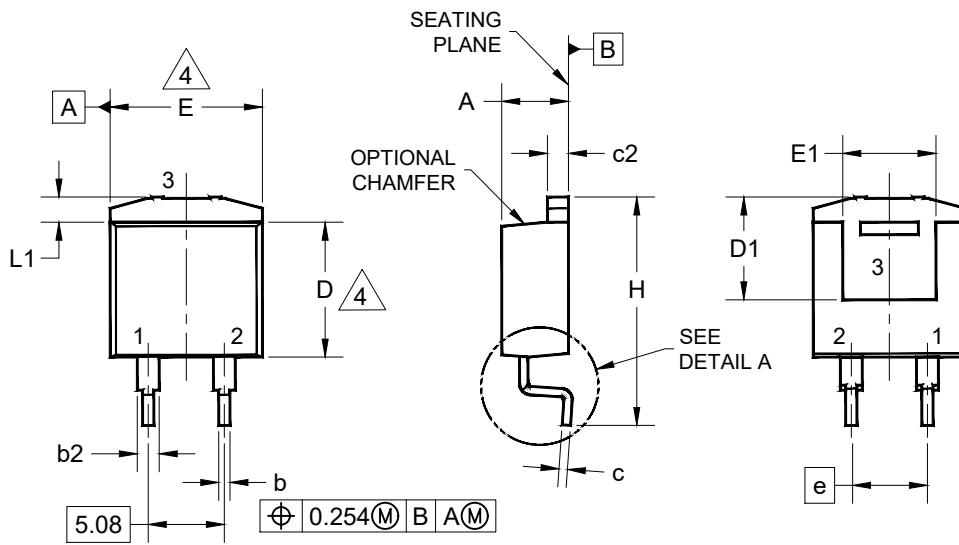


SUGGESTED PAD LAYOUT

- NOTES: UNLESS OTHERWISE SPECIFIED
1. ALL DIMENSIONS ARE IN MILLIMETERS.
 2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
 3. THE PACKAGE OUTLINE REFERENCE: JEDEC TO-263, VARIATION AB, ISSUE F.
 4. MOLDED PLASTIC BODY DIMENSIONS DO NOT INCLUDE MOLD FLASH. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREME OF THE PLASTIC BODY.
 5. DWG NO. REF: HQ2SD07-D2PAKD-066 REV A.

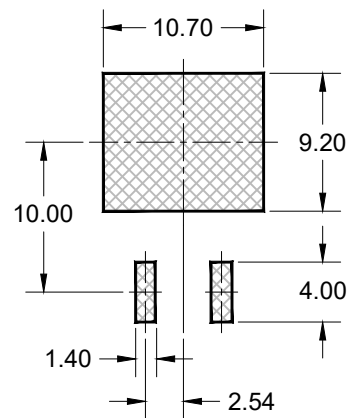

DIM	Unit (mm)	
	Min	Max
A	4.06	4.83
A1	0.00	0.25
b	0.51	0.99
b2	1.14	1.78
c	0.38	0.74
c2	1.14	1.65
D	8.38	9.65
D1	6.86	---
E	9.65	10.67
E1	6.22	---
e	5.08 BSC	
H	14.60	15.88
L	1.78	2.79
L1	0.00	1.68
L3	0.25 BSC	
\varnothing	0°	8°

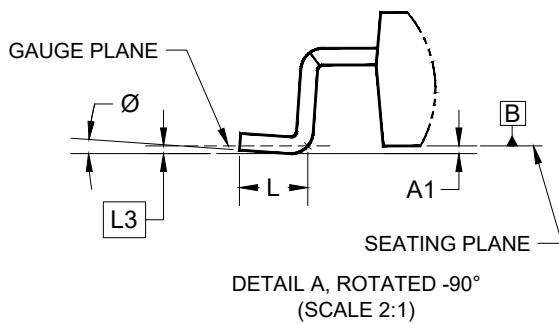


SUGGESTED PAD LAYOUT

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. THE PACKAGE OUTLINE REFERENCE: JEDEC TO-263, VARIATION AB, ISSUE F.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREME OF THE PLASTIC BODY.
5. DWG NO. REF: HQ2SD07-D2PAKD-066 REV A.

CLEARANCE REVIEW OF SCALED UNIT OVERLAY ON TOP OF PAD LAYOUT, 2LD (D2PAK-D)

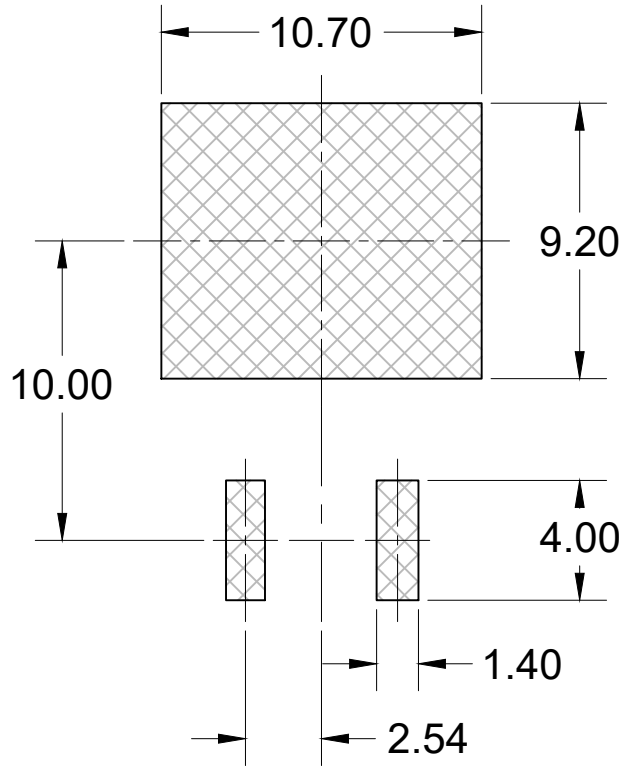

PAD LAYOUT

